

xpill round UGR

surface



EN

Suspended or ceiling mounting (with the appropriate accessory) light fittings, round shape, equipped with SMD LEDs with variable color temperature, between 3000K, 4000K or 6000K.

For 80W and 100W luminaires are single color LED temperature.

Microprismatic diffuser of polycarbonate cu UGR<19.

Backlit technology of LEDs arrangement.

The suspension accessory must be ordered separately.

Housing of aluminum board electrostatically painted with sandblasted finishing.

Fixing device made of steel sheet.

Constant current LED driver included.

Block of terminals 2P+N (10A/250V/2,5 mm²).

Three-position switch for ranging the color temperature between 3000K, 4000K or 6000K, for the CCT versions.

Range of applications

General lighting in offices, reception areas, conference rooms, schools, hospitals and commercial spaces.

RO

Corpuri de iluminat cu montaj suspendat sau pe plafon (cu accesoriul corespunzător), formă rotundă, echipate cu LED-uri SMD, cu posibilitatea de schimbare a temperaturii de culoare 3000K, 4000K și 6000K. Pentru versiunile de 80W și 100W corpurile de iluminat sunt echipate doar cu LED-uri cu o singură temperatură de culoare.

Dispersor microprismatic din policarbonat cu UGR<19.

Tehnologie de dispunere a LED-urilor tip iluminat din spate.

Accesorii de suspendare se comandă separat.

Corpul din tablă de aluminiu, vopsit în câmp electrostatic cu finisaj sablat.

Bridă de fixare din tablă de oțel.

Alimentator LED în curent constant inclus. Clemă de conexiuni 2P+N (10A/250V/2,5 mm²).

Buton cu trei poziții pentru alegerea temperaturii de culoare între 3000K, 4000K sau 6000K, pentru versiunile CCT.

Buton cu trei poziții pentru alegerea temperaturii de culoare între 3000K, 4000K sau 6000K, pentru versiunile CCT.

Aplicații

Iluminatul general în birouri, zone de recepție, săli de conferințe, școli, spitale și spații comerciale.

IT

Apparecchi per montaggio a sospensione o a soffitto (con l'accessorio appropriato), forma tonda, equipaggiati di LED SMD, con la possibilità di cambiare la temperatura del colore tra 3000K, 4000K o 6000K.

Per le versioni da 80W e 100W sono disponibili apparecchi con una singola temperatura del colore.

Diffusore microprismatico in policarbonato con grado UGR<19.

Tecnologia backlight di disposizione dei LED.

L'accessorio di sospensione deve essere ordinato separatamente.

Corpo in lamiera di alluminio, verniciato a polveri con finitura sabbiata.

Staffa di fissaggio in lamiera di acciaio.

Alimentatore LED in corrente costante, incluso. Morsetteria 2P+N (10A/250V/2,5 mm²).

Interruttore a tre posizioni per la scelta della temperatura del colore tra 3000K, 4000K o 6000K, per le versioni CCT.

Campi di applicazione

Illuminazione generale di uffici, aree ricettive, sale per conferenze, scuole, ospedali e negozi.



IMPORTANT

On request the luminaires from this family can be equipped with DALI drivers or TRIAC dimmable drivers.

IMPORTANT

La cerere corpurile de iluminat din această familie pot fi echipate cu alimentatoare DALI sau alimentatoare dimmabile TRIAC.

IMPORTANTE

Su richiesta gli apparecchi di questa famiglia possono essere equipaggiati con alimentatori DALI o alimentatori dimmerabili TRIAC.



see also **xpill round ugr suspended** at page 244





xpill round UGR surface



PXRU01

FINISHING AVAILABLE

SWH SBK





Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PXRU01CCT SWH	SWH	SMD 2835	40W	220-240V AC	1000 mA / 30-40V DC	Included	5200 lm	3677 lm	3000/4000/6000K	90	80°	2,30 kg
PXRU01CCT SBK	SBK	SMD 2835	40W	220-240V AC	1000 mA / 30-40V DC	Included	5200 lm	3357 lm	3000/4000/6000K	90	80°	2,30 kg

PXRU02

FINISHING AVAILABLE

SWH SBK





Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PXRU02CCT SWH	SWH	SMD 2835	50W	220-240V AC	1050 mA / 29-48V DC	Included	6800 lm	5092 lm	3000/4000/6000K	90	80°	3,65 kg
PXRU02CCT SBK	SBK	SMD 2835	50W	220-240V AC	1050 mA / 29-48V DC	Included	6800 lm	4692 lm	3000/4000/6000K	90	80°	3,65 kg

PXRU03

FINISHING AVAILABLE

SWH SBK





Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PXRU03CCT SWH	SWH	SMD 2835	60W	220-240V AC	1400 mA / 26-43V DC	Included	8400 lm	5521 lm	3000/4000/6000K	90	80°	5,09 kg
PXRU03CCT SBK	SBK	SMD 2835	60W	220-240V AC	1400 mA / 26-43V DC	Included	8400 lm	5021 lm	3000/4000/6000K	90	80°	5,09 kg

PXRU04

FINISHING AVAILABLE

SWH SBK





Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PXRU04WW SWH	SWH	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	11000 lm	7460 lm	3000K	90	80°	10,00 kg
PXRU04WW SBK	SBK	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	11000 lm	6830 lm	3000K	90	80°	10,00 kg
PXRU04NW SWH	SWH	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	11500 lm	7730 lm	4000K	90	80°	10,00 kg
PXRU04NW SBK	SBK	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	11500 lm	7056 lm	4000K	90	80°	10,00 kg

PXRU05

FINISHING AVAILABLE

SWH SBK

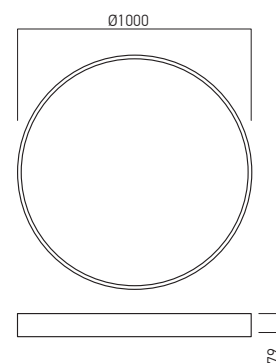

Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PXRU05WW SWH	SWH	SMD 2835	100W	220-240V AC	1050 mA / 29-48V DC	Included	16000 lm	10595 lm	3000K	90	80°	14,20 kg
PXRU05WW SBK	SBK	SMD 2835	100W	220-240V AC	1050 mA / 29-48V DC	Included	16000 lm	9836 lm	3000K	90	80°	14,20 kg
PXRU05NW SWH	SWH	SMD 2835	100W	220-240V AC	1050 mA / 29-48V DC	Included	16800 lm	10834 lm	4000K	90	80°	14,20 kg
PXRU05NW SBK	SBK	SMD 2835	100W	220-240V AC	1050 mA / 29-48V DC	Included	16800 lm	10021 lm	4000K	90	80°	14,20 kg