
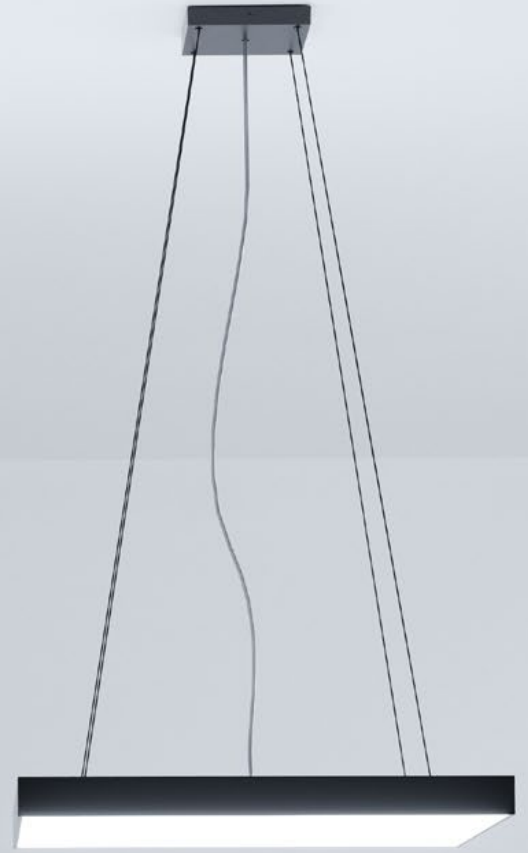


# xpill square UGR

## suspended

5 YEARS  
WARRANTY

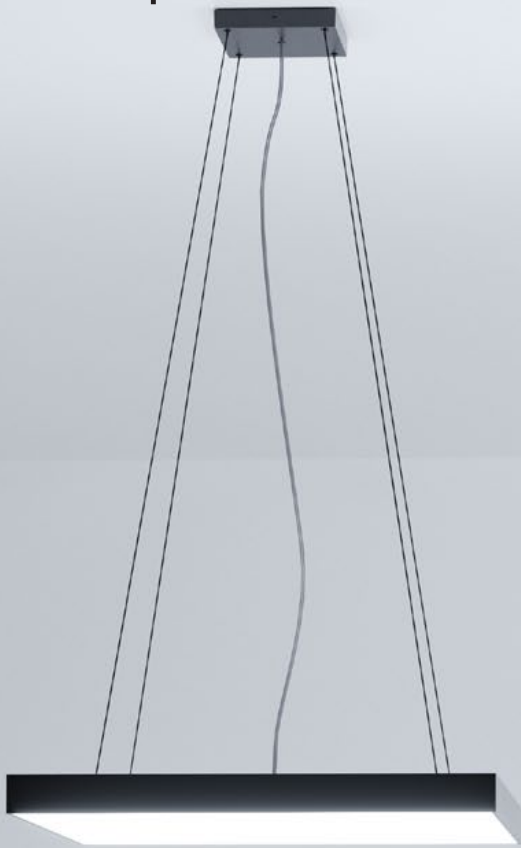

**EN**

Suspended or ceiling mounting (with the appropriate accessory) light fittings, square shape, equipped with SMD LEDs with variable color temperature, between 3000K, 4000K or 6000K.

The 80W luminaires are single color LED temperature.

Version with microprismatic diffuser, UGR<19.

Backlit technology of LEDs arrangement.

The suspension accessory must be ordered separately.

Housing of aluminum board electrostatically painted with sandblasted finishing.

Fixing device made of steel sheet.

Constant current LED driver included.

Block of terminals 2P+N (10A/250V/2,5 mm<sup>2</sup>).

Three-position switch for ranging the color temperature between 3000K, 4000K or 6000K, for the CCT versions.

**Range of applications**

General lighting in offices, reception areas, conference rooms, schools, hospitals and commercial spaces.

**RO**

Corpuri de iluminat cu montaj suspendat sau pe plafon (cu accesoriul corespunzător), formă pătrată, echipate cu LED-uri SMD, cu posibilitatea de schimbare a temperaturii de culoare 3000K, 4000K și 6000K.

Pentru versiunea de 80W corpurile de iluminat sunt echipate doar cu LED-uri cu o singură temperatură de culoare.

Versiune cu dispersor microprismatic cu UGR<19.

Tehnologie de dispunere a LED-urilor tip iluminat din spate.

Accesoriul de suspendare se comandă separat.

Corpul din tablă de aluminiu, vopsit în câmp electrostatic cu finisaj sablat.

Bridă de fixare din tablă de oțel.

Alimentator LED în curent constant inclus.

Clemă de conexiuni 2P+N (10A/250V/2,5 mm<sup>2</sup>).

Buton cu trei poziții pentru alegerea temperaturii de culoare între 3000K, 4000K sau 6000K, pentru versiunile CCT.

**Aplicații**

Iluminatul general în birouri, zone de recepție, săli de conferințe, școli, spitale și spații comerciale.

**IT**

Apparecchi per montaggio a sospensione o a soffitto (con l'accessorio appropriato), forma quadrata, equipaggiati di LED SMD, con la possibilità di cambiare la temperatura del colore tra 3000K, 4000K o 6000K.

Per versioni da 80W sono disponibili con singola temperatura del colore.

Versione con diffusore microprismatico con grado UGR<19.

Tecnologia backlight di disposizione dei LED.

L'accessorio di sospensione deve essere ordinato separatamente.

Corpo in lamiera di alluminio, verniciato a polveri con finitura sabbiata.

Staffa di fissaggio in lamiera di acciaio.

Alimentatore LED in corrente costante, incluso. Morsetteria

2P+N (10A/250V/2,5 mm<sup>2</sup>).

Interruttore a tre posizioni per la scelta della temperatura del colore tra 3000K, 4000K o 6000K, per le versioni CCT.

**Campi di applicazione**

Illuminazione generale di uffici, aree ricettive, sale per conferenze, scuole, ospedali e negozi.

**IMPORTANT**


On request the luminaires from this family can be equipped with DALI drivers or TRIAC dimmable drivers.

**IMPORTANT**

La cerere corpurile de iluminat din această familie pot fi echipate cu alimentatoare DALI sau alimentatoare dimabile TRIAC.

**IMPORTANTE**

Su richiesta gli apparecchi di questa famiglia possono essere equipaggiati con alimentatori DALI o alimentatori dimmerabili TRIAC.



see also


**xpill UGR square surface**  
at page 272

# xpill square UGR suspended



## PXQU01

FINISHING AVAILABLE

SWH SBK

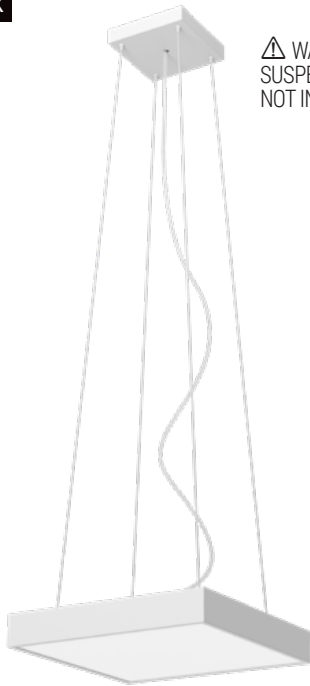


⚠ WARNING!  
SUSPENSION SYSTEMS  
NOT INCLUDED

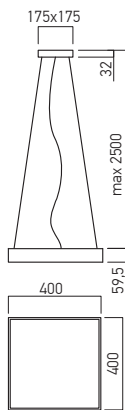



## PXQU02

FINISHING AVAILABLE

SWH SBK

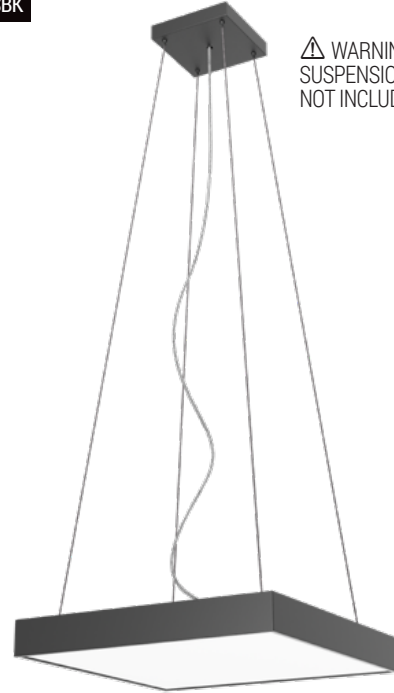

⚠ WARNING!  
SUSPENSION SYSTEMS  
NOT INCLUDED

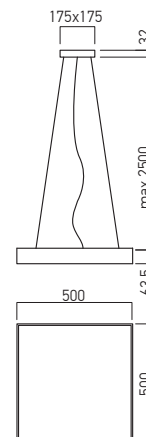

Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PXQU01CCT SWH	SWH	SMD 2835	40W	220-240V AC	1000 mA / 24-40V DC	Included	5200 lm	3382 lm	3000K/4000K/6000K	90	80°	3,80 kg
PXQU01CCT SBK	SBK	SMD 2835	40W	220-240V AC	1000 mA / 24-40V DC	Included	5200 lm	3056 lm	3000K/4000K/6000K	90	80°	3,80 kg
PXQU02CCT SWH	SWH	SMD 2835	50W	220-240V AC	1050 mA / 29-48V DC	Included	7000 lm	5092 lm	3000K/4000K/6000K	90	80°	5,50 kg
PXQU02CCT SBK	SBK	SMD 2835	50W	220-240V AC	1050 mA / 29-48V DC	Included	7000 lm	4691 lm	3000K/4000K/6000K	90	80°	5,50 kg

## SUSPENSION SYSTEMS


Suspension systems with four twisted steel wires, maximum length of 2.5m, 2P+N power supply cable (3m, with transparent silicone cover) and steel box for electrical connections, ceiling mounted, electrostatically painted.

Sisteme de suspendare cu patru fire torsadate din oțel, lungimea maximă de 2,5m, cablu de alimentare 2P+N (3m, cu înveliș din silicon transparent) și cutie din oțel pentru conexiunile electrice, cu montaj pe tavan, vopsită în câmp electrostatic.

Sistemi di sospensione con quattro fili in acciaio intrecciato, lunghezza massima di 2,5m, cavo di alimentazione 2P+N (3m, rivestito in silicone trasparente) e basetta in acciaio per connessioni elettriche, con montaggio a soffitto, verniciata a polveri.


FINISHING AVAILABLE

SWH SBK



FINISHING AVAILABLE

SWH SBK




Code	Finishing	Supported models	Weight	Code	Finishing	Supported models	Weight
PXQ0123SU SWH	SWH	PXQU01/02/03	0,75 kg	PXQ04SU SWH	SWH	PXQU04	0,84 kg
PXQ0123SU SBK	SBK	PXQU01/02/03	0,75 kg	PXQ04SU SBK	SBK	PXQU04	0,84 kg



PXQU03

FINISHING AVAILABLE

SWH SBK

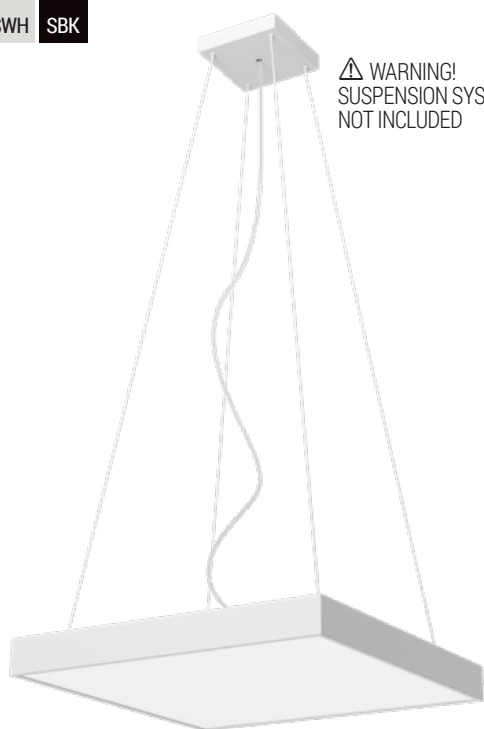


⚠ WARNING!  
SUSPENSION SYSTEMS  
NOT INCLUDED

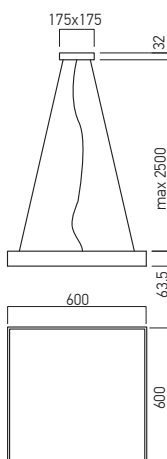



PXQU04

FINISHING AVAILABLE

SWH SBK

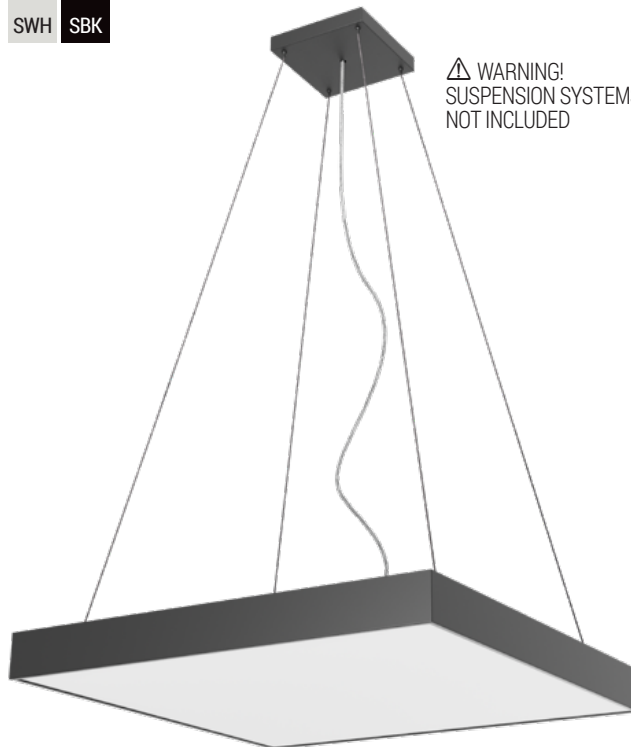

⚠ WARNING!  
SUSPENSION SYSTEMS  
NOT INCLUDED

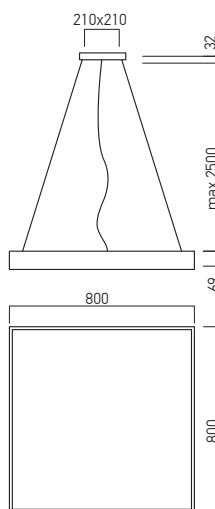

Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PXQU03CCT SWH	SWH	SMD 2835	60W	220-240V AC	1400 mA / 26-43V DC	Included	8500 lm	5890 lm	3000K/4000K/6000K	90	80°	6,50 kg
PXQU03CCT SBK	SBK	SMD 2835	60W	220-240V AC	1400 mA / 26-43V DC	Included	8500 lm	5284 lm	3000K/4000K/6000K	90	80°	6,50 kg
PXQU04WW SWH	SWH	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	12300 lm	7818 lm	3000K	90	80°	11,00 kg
PXQU04WW SBK	SBK	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	12300 lm	7306 lm	3000K	90	80°	11,00 kg
PXQU04NW SWH	SWH	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	12600 lm	8098 lm	4000K	90	80°	11,00 kg
PXQU04NW SBK	SBK	SMD 2835	80W	220-240V AC	1500 mA / 23-51V DC	Included	12600 lm	7451 lm	4000K	90	80°	11,00 kg

⚠ WARNING! SUSPENSION SYSTEMS NOT INCLUDED

Suspension systems are not included, have to be ordered separated.

Sistemele de suspendare nu sunt incluse, trebuiesc comandate separat.

I sistemi di sospensione non sono inclusi, devono essere ordinati separatamente.