

xspecter wall

5 YEARS WARRANTY



EN
Luminaires for wall mounting, direct/indirect light flux distribution, equipped with SMD LEDs.
Structure and wall fixing system of aluminum profile, electrostatically painted with sandblasted finishing.
Diffusers of opal polycarbonate for indirect light.
Diffuser of prismatic polystyrene for direct light.
Light guiding plate with screen printed grid of PMMA.
Constant current driver included in the housing of the fixing system.
Self-locking block of terminals 2P+N (10A/250V/2,5 mm²).
Range of applications
General interior lighting in offices, residential and recreational areas.


RO
Corpuri de iluminat tip aplică, distribuție directă/indirectă a fluxului luminos, echipate cu LED-uri SMD.
Structură și sistem de fixare pe perete din profil de aluminiu vopsite în câmp electrostatic cu finisaj sablat.
Dispersoare din policarbonat transparent pentru iluminatul indirect.
Dispersor prismatic din polistiren pentru iluminatul direct.
Placă de ghidare a luminii, serigrafată, din PMMA.
Alimentator în curent constant inclus în carcasa sistemului de fixare.
Clemă de conexiuni cu autoblocare 2P+N (10A/250V/2,5 mm²).
Aplicații
Iluminatul general de interior în birouri, zone rezidențiale și zone de agrement.

IT
Apparecchi per montaggio a parete, distribuzione del flusso luminoso diretta/indiretta, equipaggiati con LED SMD.
Struttura e sistema di fissaggio in alluminio estruso, verniciati a polveri con finitura sabbata.
Diffusori in policarbonato trasparente per luce indiretta.
Diffusore in polistirene prismatico per luce diretta.
Piastra guida di luce con griglia serigrafata in PMMA.
Alimentatore in corrente costante incluso in corpo di sistemi di fissaggio.
Morsetteria autobloccante 2P+N (10A/250V/2,5 mm²).
Campi di applicazione
Illuminazione generale per interni in uffici, aree residenziali e ricreative.

SPC03

FINISHING AVAILABLE

SWH SBK

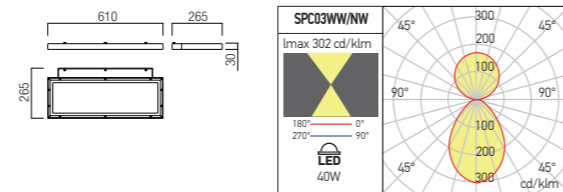

Code	Finishing	LED type	Power	Input voltage	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
SPC03WW SWH	SWH	SMD 2835 SEOUL Semiconductor	40W 20W up, 20W down	200-240V AC	1050 mA / 35V DC	Included	5184 lm 2680 up, 2504 down	3305 lm 1709 up, 1596 down	3000K	>90	90° up 80° down	3,20 kg
SPC03WW SBK	SBK	SMD 2835 SEOUL Semiconductor	40W 20W up, 20W down	200-240V AC	1050 mA / 35V DC	Included	5184 lm 2680 up, 2504 down	3305 lm 1709 up, 1596 down	3000K	>90	90° up 80° down	3,20 kg
SPC03NW SWH	SWH	SMD 2835 SEOUL Semiconductor	40W 20W up, 20W down	200-240V AC	1050 mA / 35V DC	Included	5386 lm 2780 up, 2606 down	3427 lm 1772 up, 1655 down	4000K	>90	90° up 80° down	3,20 kg
SPC03NW SBK	SBK	SMD 2835 SEOUL Semiconductor	40W 20W up, 20W down	200-240V AC	1050 mA / 35V DC	Included	5386 lm 2780 up, 2606 down	3427 lm 1772 up, 1655 down	4000K	>90	90° up 80° down	3,20 kg



see also:
xspecter suspension
 at page 378
xspecter floor
 at page 216