

Luminaire


 Code GS03WWIP65_BK
 Name XGHOST

Measur.

 Code GS03WWIP65_BK
 Name XGHOST



Luminaire Flux	107.85 lm	Luminaire Power	2.50 W	Efficacy	43.14 lm/W	Efficiency	99.86%
Lamps Flux	108.00 lm	Maximum value	1795.98 cd/klm	Position	C=0.00 G=12.00	CG	Asymmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	160 mm 160 mm	Width Width	30 mm 30 mm	Height Height	5 mm 5 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004800 m2 0.000800 m2 0.000150 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000800 m2 0.000150 m2 0.001937 m2			
Coordinate system Date Measurement Distance	CG 30-08-2021 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux	Asymmetrical 90 117.00 lm			
Operator Temperature Humidity Notes	25.00 °C 60.00 %		Source Voltage [V] Source current [A] Photocell				

Line		Code	Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		GS03WWIP65_BK	Name	XGHOST	108.00	2.50	1
C.I.E.	86 99 100 100 100		D DIN 5040	A60			
F UTE	1.00 A		B NBN	BZ 1			

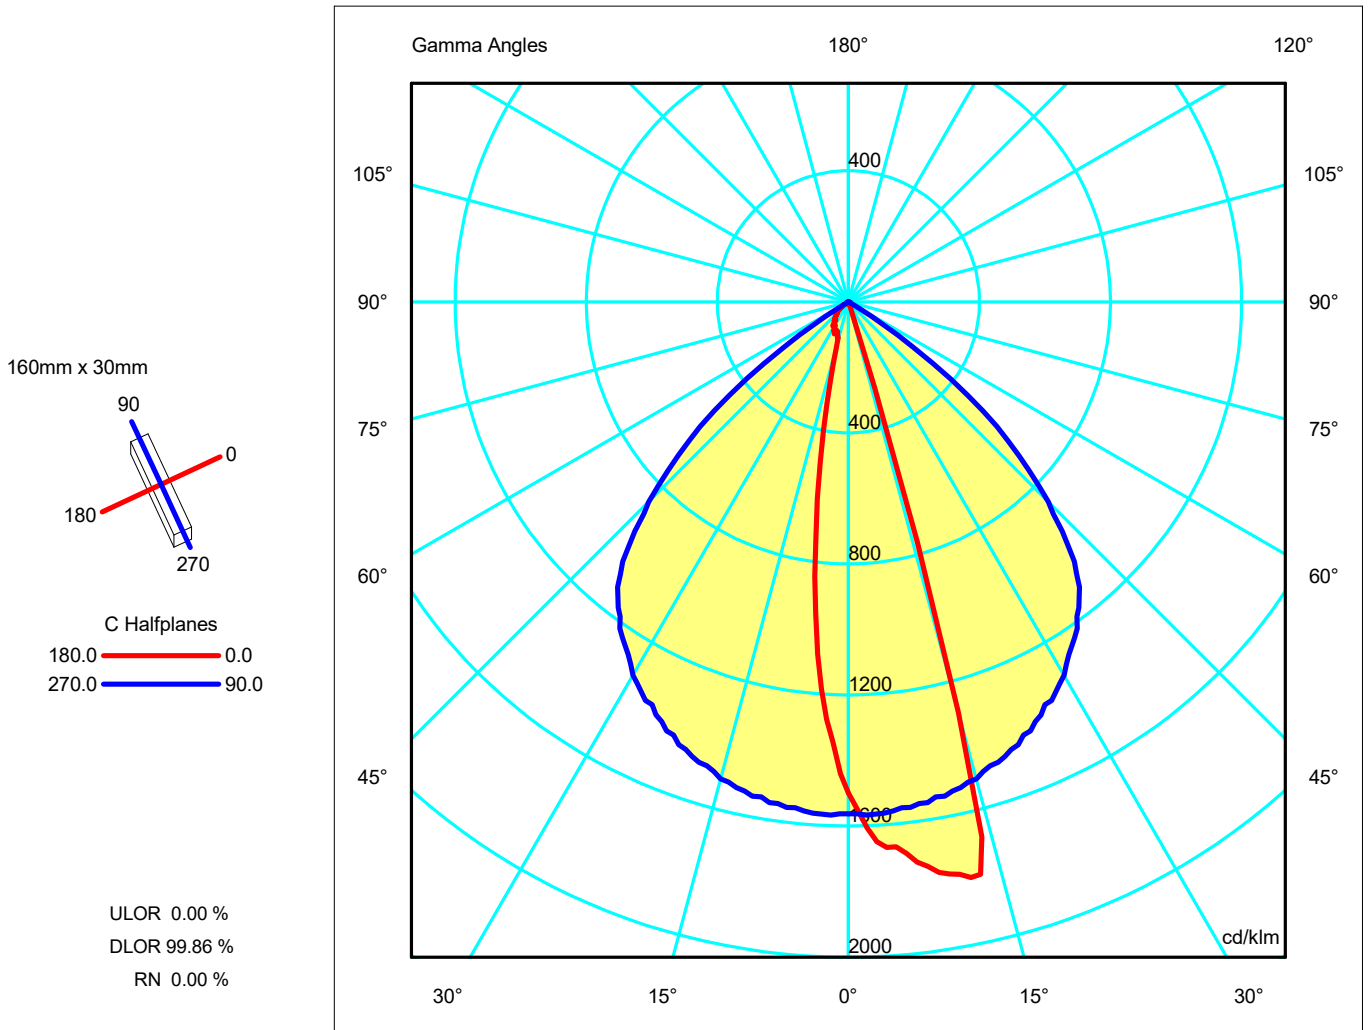

Luminaire
 Code GS03WWIP65_BK
 Name XGHOST
Measur.
 Code GS03WWIP65_BK
 Name XGHOST

Luminaire Flux	107.85 lm	Luminaire Power	2.50 W	Efficacy	43.14 lm/W	Efficiency	99.86%
Lamps Flux	108.00 lm	Maximum value	1795.98 cd/klm	Position	C=0.00 G=12.00	CG	Asymmetrical

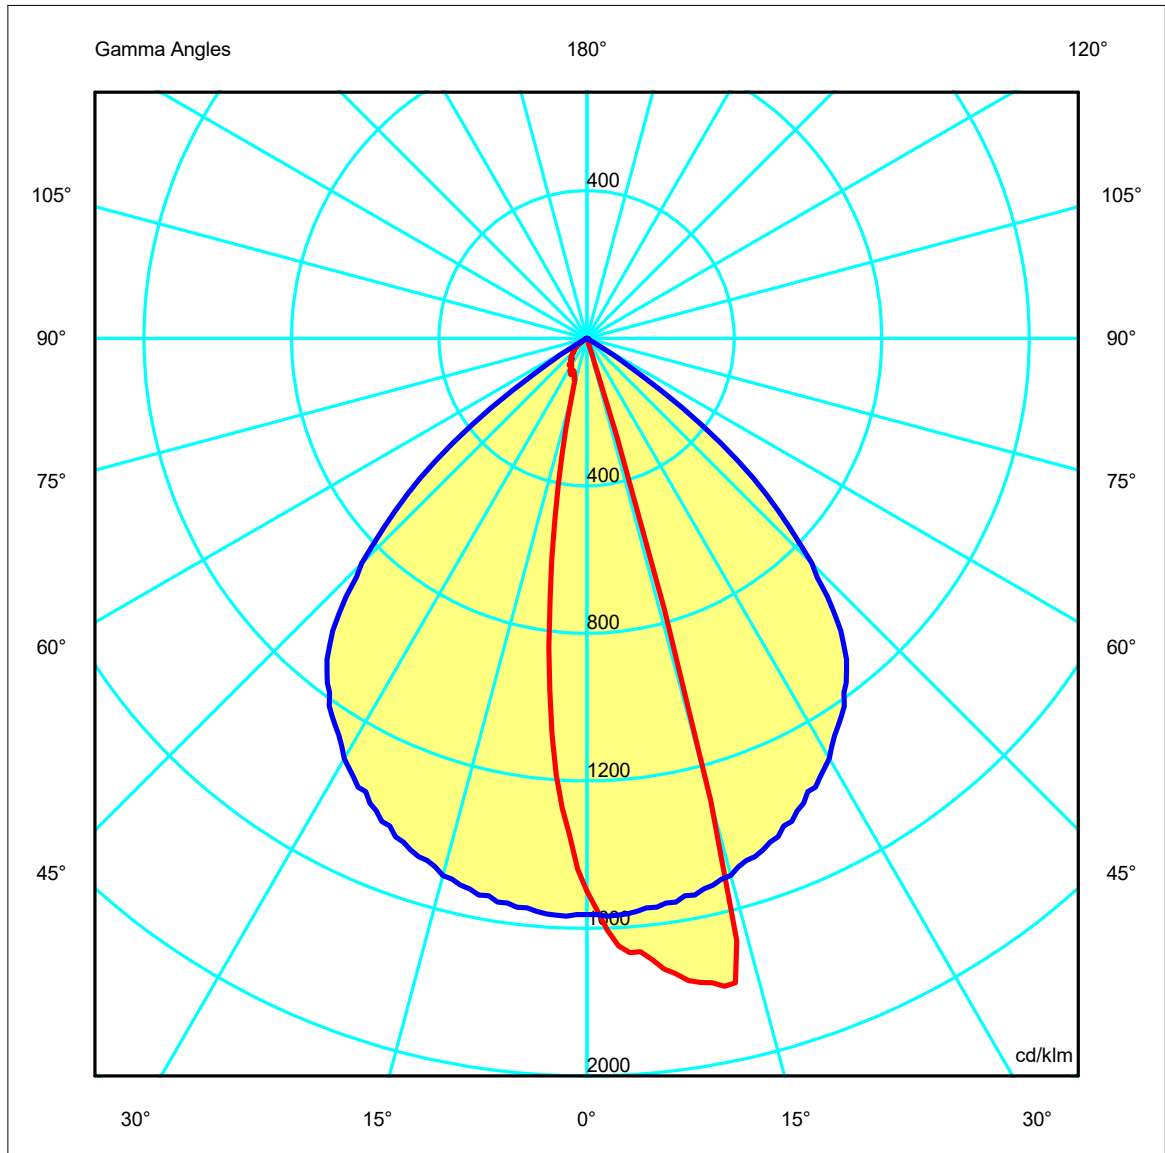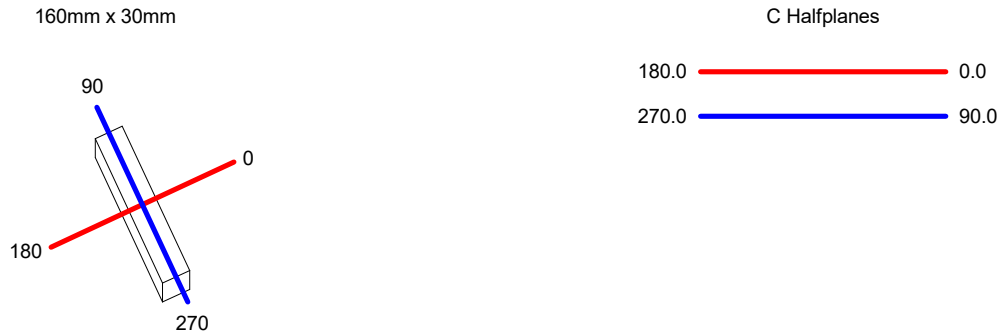

Luminaire

Code GS03WWIP65_BK
Name XGHOST

Measurement

Code GS03WWIP65_BK
Name XGHOST

Luminaire Flux	107.85 lm	Luminaire Power	2.50 W	Efficacy	43.14 lm/W	Efficiency	99.86%
Lamps Flux	108.00 lm	Maximum value	1795.98 cd/klm	Position	C=0.00 G=12.00	CG	Asymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	7.4	8.2	7.7	8.4	21.0	19.8	20.6	20.1	20.8	21.0
x=2H y=3H	7.4	8.1	7.6	8.3	20.9	19.7	20.4	20.0	20.6	20.9
x=2H y=4H	7.3	8.0	7.6	8.2	20.8	19.6	20.3	19.9	20.5	20.8
x=2H y=6H	7.2	7.8	7.6	8.1	20.7	19.5	20.2	19.9	20.4	20.7
x=2H y=8H	7.2	7.8	7.5	8.1	20.7	19.5	20.1	19.8	20.4	20.7
x=2H y=12H	7.1	7.7	7.5	8.0	20.7	19.5	20.0	19.8	20.3	20.7
x=4H y=2H	8.2	8.8	8.5	9.1	20.8	19.6	20.3	19.9	20.6	20.8
x=4H y=3H	8.1	8.7	8.5	9.0	20.7	19.5	20.0	19.8	20.3	20.7
x=4H y=4H	8.1	8.5	8.4	8.9	20.6	19.4	19.9	19.8	20.2	20.6
x=4H y=6H	8.0	8.4	8.4	8.8	20.5	19.3	19.7	19.7	20.1	20.5
x=4H y=8H	8.0	8.3	8.4	8.7	20.5	19.3	19.7	19.7	20.1	20.5
x=4H y=12H	7.9	8.2	8.3	8.6	20.4	19.3	19.6	19.7	20.0	20.4
x=8H y=4H	8.0	8.4	8.4	8.8	20.5	19.3	19.7	19.7	20.1	20.5
x=8H y=6H	7.9	8.2	8.4	8.6	20.4	19.2	19.5	19.7	19.9	20.4
x=8H y=8H	7.9	8.1	8.4	8.6	20.3	19.2	19.4	19.6	19.9	20.3
x=8H y=12H	7.8	8.0	8.3	8.5	20.3	19.1	19.3	19.6	19.8	20.3
x=12H y=4H	8.0	8.3	8.4	8.7	20.4	19.3	19.6	19.7	20.0	20.4
x=12H y=6H	7.9	8.1	8.4	8.6	20.3	19.2	19.4	19.6	19.9	20.3
x=12H y=8H	7.8	8.0	8.3	8.5	20.3	19.1	19.3	19.6	19.8	20.3